


NEW
Collection 15 - 16



Cubus

The ultimate flooring
The ultimate performance

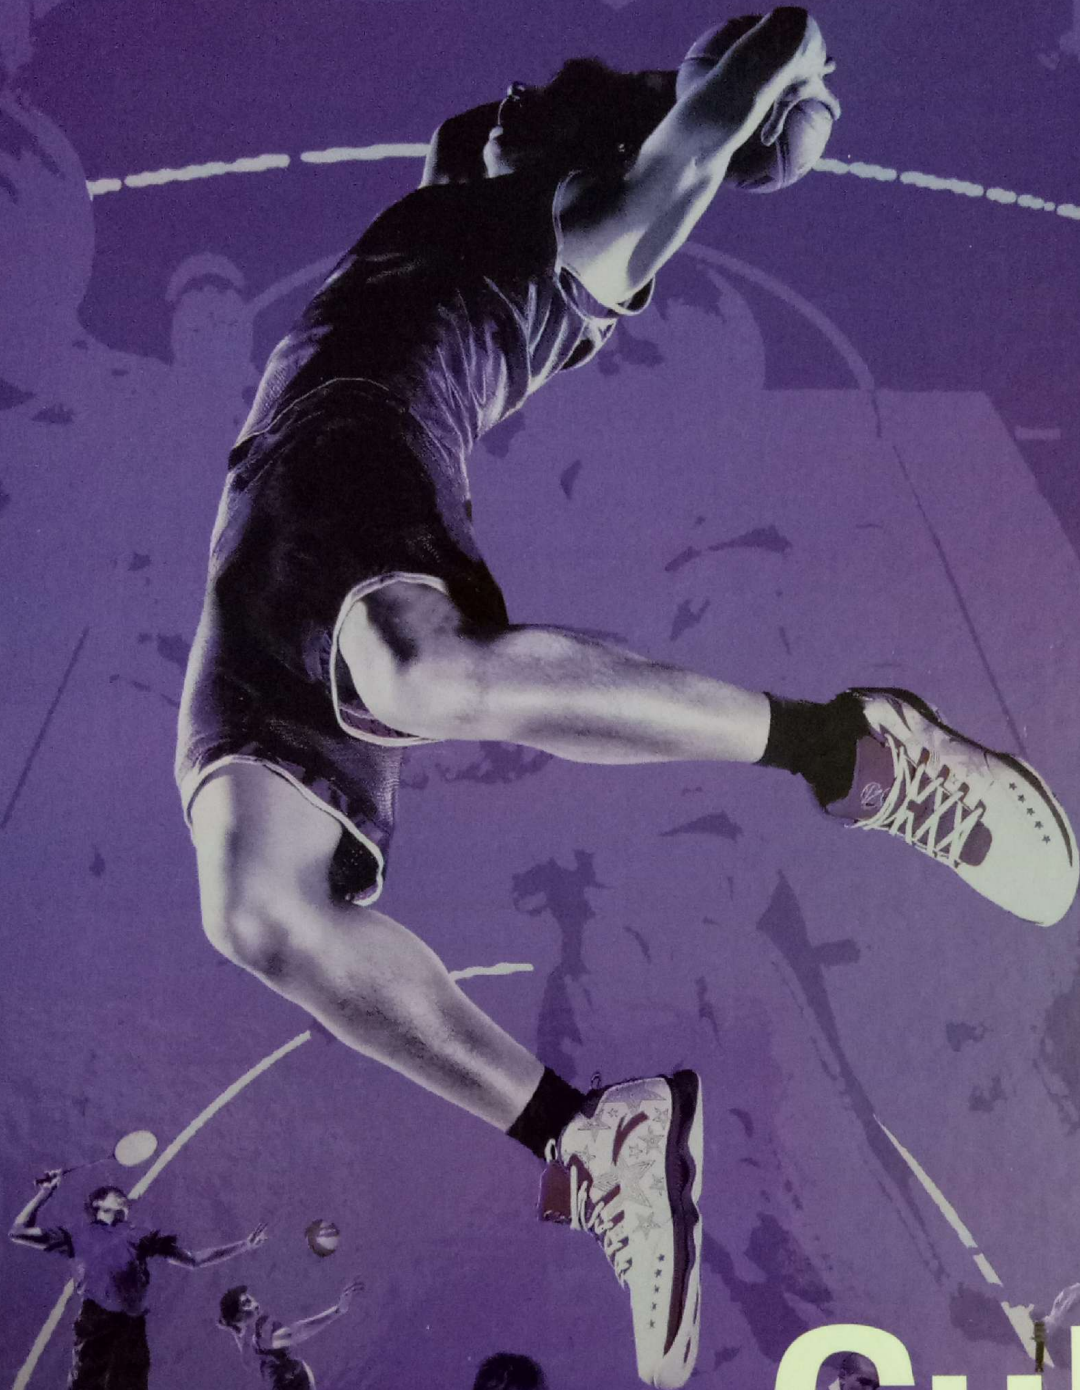

EXCEL[®]
CLASSIC FLOORS



Grey



Light Green



Red



Yellow



Orange



Sky Blue



Brown



STRUCTURE OF STYLE



THE ADVANTAGES OF STYLE



Excellent durability and wear resistance to heavy traffic and abrasion: Pure PVC wearlayer.



Fire resistance : GB 8624 B1.



No need for initial polishing and suitable in all intense traffic applications.



Dimension stability: Adopting the special glass fiber layer + solid homogeneous calendered sheet.



Easy cleaning and economical maintenance: UV coating.



Good sound insulation: 19dB Closed cell foam backing layer.

Technical Data

Product Description			Cubus
Total Thickness	EN 428	mm	3.00mm
Wearlayer thickness	EN 429	mm	0.8mm
Weight	EN 430	g/m ²	2650g/m ²
Roll width	EN 426	cm	180cm
Roll length	EN 426	m	20m

Classification			
Classification	EN 685	class	34-42
Fire rating	NF P 92-506	-	M2
	EN 13 501-1	-	Class Bfl-S1
	ASTM E648	-	Class 1
Toxic testing	GB 8624-2006	-	GB 8624 B1
	GB 18586-2001	-	Pase
Electrical resistance	EN 1815	kv	<2
	En1081	Ω	≥ 10°
Slip resistance dry	EN 13893	-	≥0.3
Slip resistance wet	DIN 51130	-	R10

Performance			
Abrasion resistance	EN 649	-	Group T
Dimensional stability	EN 434	%	≤0.40
Residual indentation	EN 433	mm	≤0.20
Thermal resistance	EN 12 524	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	Degree	≥6
Chemical resistance	EN 423	-	good
Castor wheel test	EN 425	-	suitable
Impact sound reduction	EN ISO 717/2	dB	19
Flexibility	EN 435	-	excellent
Anti-bacterial and fungicidal	MRSA	-	very good
	DIN EN ISO 846-A/C	-	Good
Surface treatment			UV
Underfloor heating		°C	Suitable max. 28
Maritime usage	IMO RES A 653 (16)-IMO MSC 61 (67) Annex 1 Part 2,5		

