


Scanned by CamScanner







Scanned by CamScanner

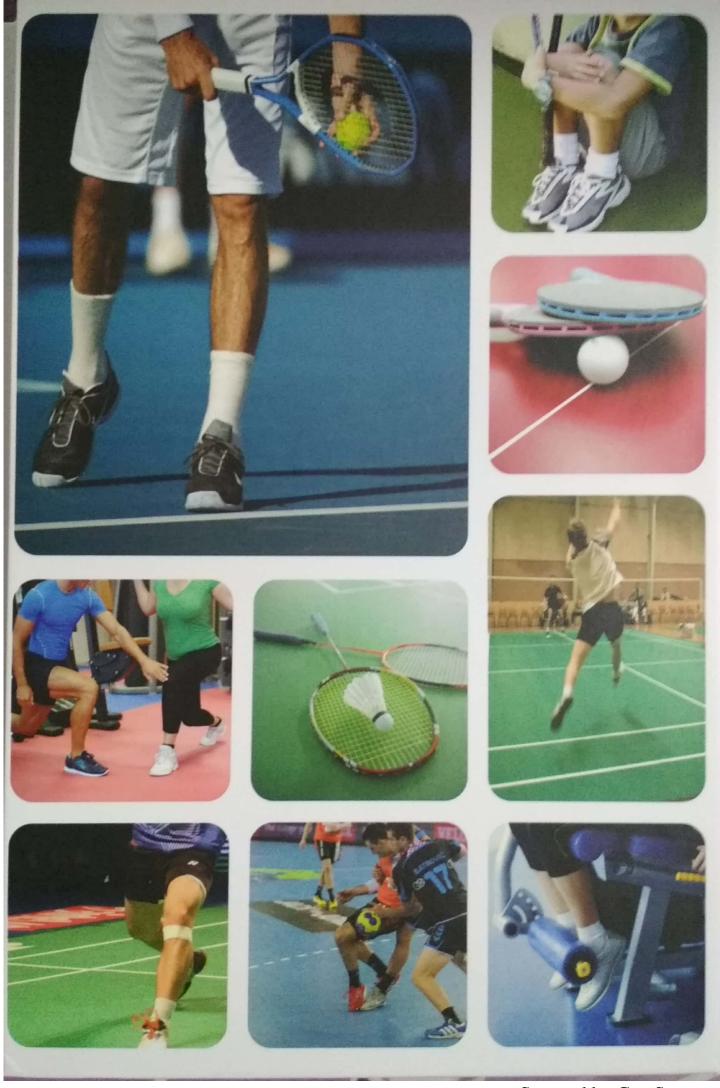

Scanned by CamScanner



PRODUCT PARAMETERS

| Technical Data | Test Method | Test Results |
|------------------------|-------------|----------------------------|
| Total Thickness | EN 428 | 3.0mm/4.5mm/6.5mm |
| Wear Layer Thickness | EN 429 | 0.45/0.6mm/0.8mm |
| Total Weight | EN 430 | 2670g/m²/3520g/m²/4800g/m² |
| Roll Width | EN 426 | 1.8m |
| Roll Length | EN 426 | 20m/15m/10m |
| Indentation Resistance | EN 1516 | ≤0.5/≤0.6/≤0.6 |
| Abrasion Resistance | EN 5470-1 | ≤300mg |
| Impact Resistance | DIN 18032 | ≥8 |
| Sound Insulation | ENISO717-2 | 20-30Db |
| Friction Coefficient | ENI3036-4 | 0.45-0.65 |
| Ball Bounce | DIN 18032 | ≥98% |
| Fire Resistance | CE | Bf1-S1 |
| Surface Treatment | * | UV/PUR |

Applicable place





Dance studi



Gym



Public facilitie



Kindergarten



Others

